


# MR MAXI30i\_HR12

## AIR HANDLER

### DATASHEET

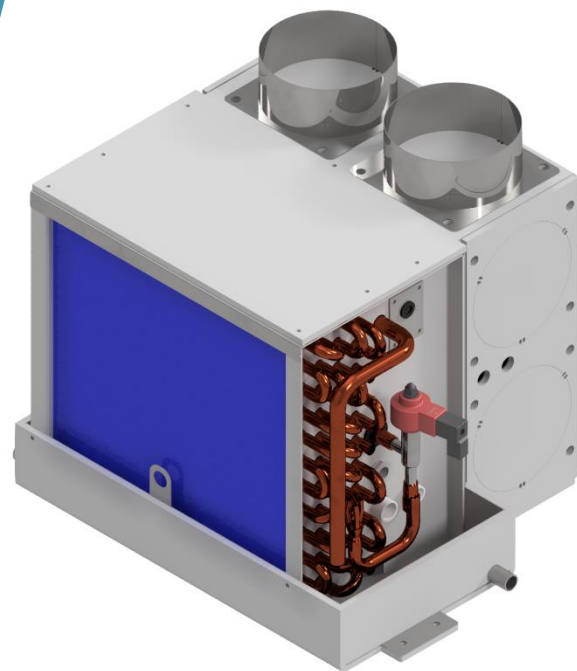



#### CAPACITY

Air flow m <sup>3</sup> / h	100	750	1200
Cooling Kw	1,0	5,0	8,0
Heating Kw	1,0	5,0	8,0

<b>Total BTU Capacity:</b>	30000 BTU/h
<b>Static pressure:</b>	800 Pa
<b>Power supply:</b>	230 Vac 50/60 Hz
<b>Power consumption:</b>	100 W (typical) – 170 W (max)
<b>Electric heating:</b>	1200 W
<b>Control:</b>	Data bus rs485 Modbus RTU
<b>Size W x D x H:</b>	450 x 350 x 367 mm
<b>Weight:</b>	11 Kg
<b>Frame:</b>	Stainless steel 316
<b>Air working range:</b>	-20°C to +50°C
<b>Noise:</b>	10 dB (night mode) - 65 dB (max)
<b>Vibration:</b>	No significant vibration
<b>Air duct size mm:</b>	2 x 125
<b>Refrigerant pipe:</b>	1/2" Gas      3/8" Liquid


# MR MAXI30i\_HR12

## FAN PERFORMANCE

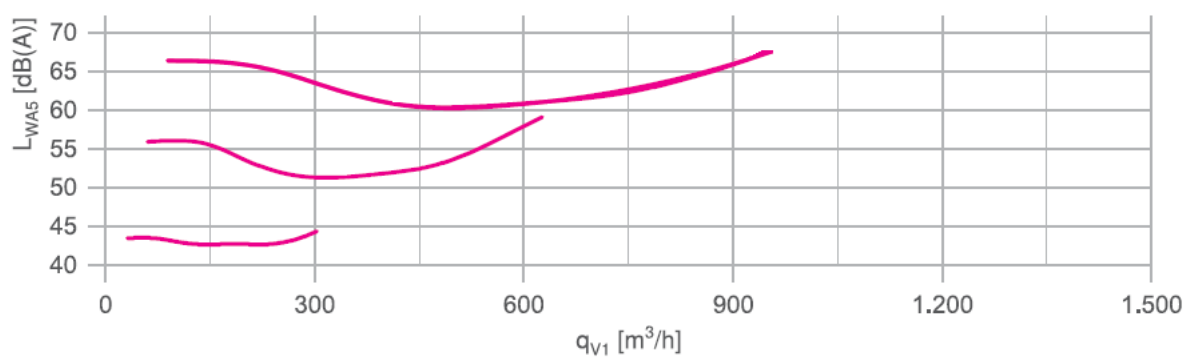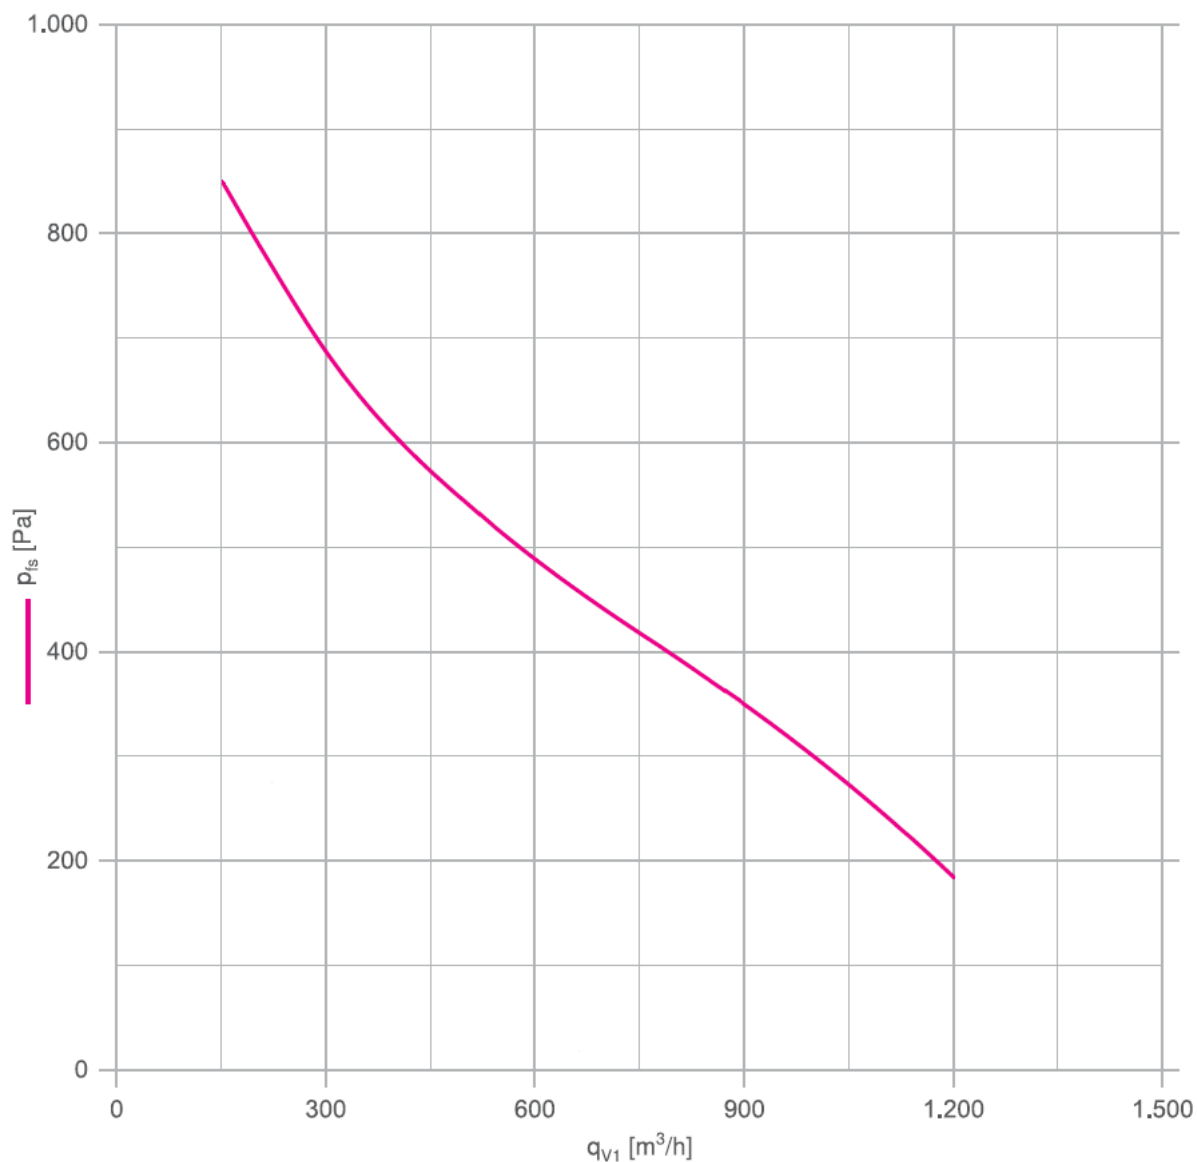

# MR MAXI30i\_HR12

## ELECTRICAL CONNECTIONS

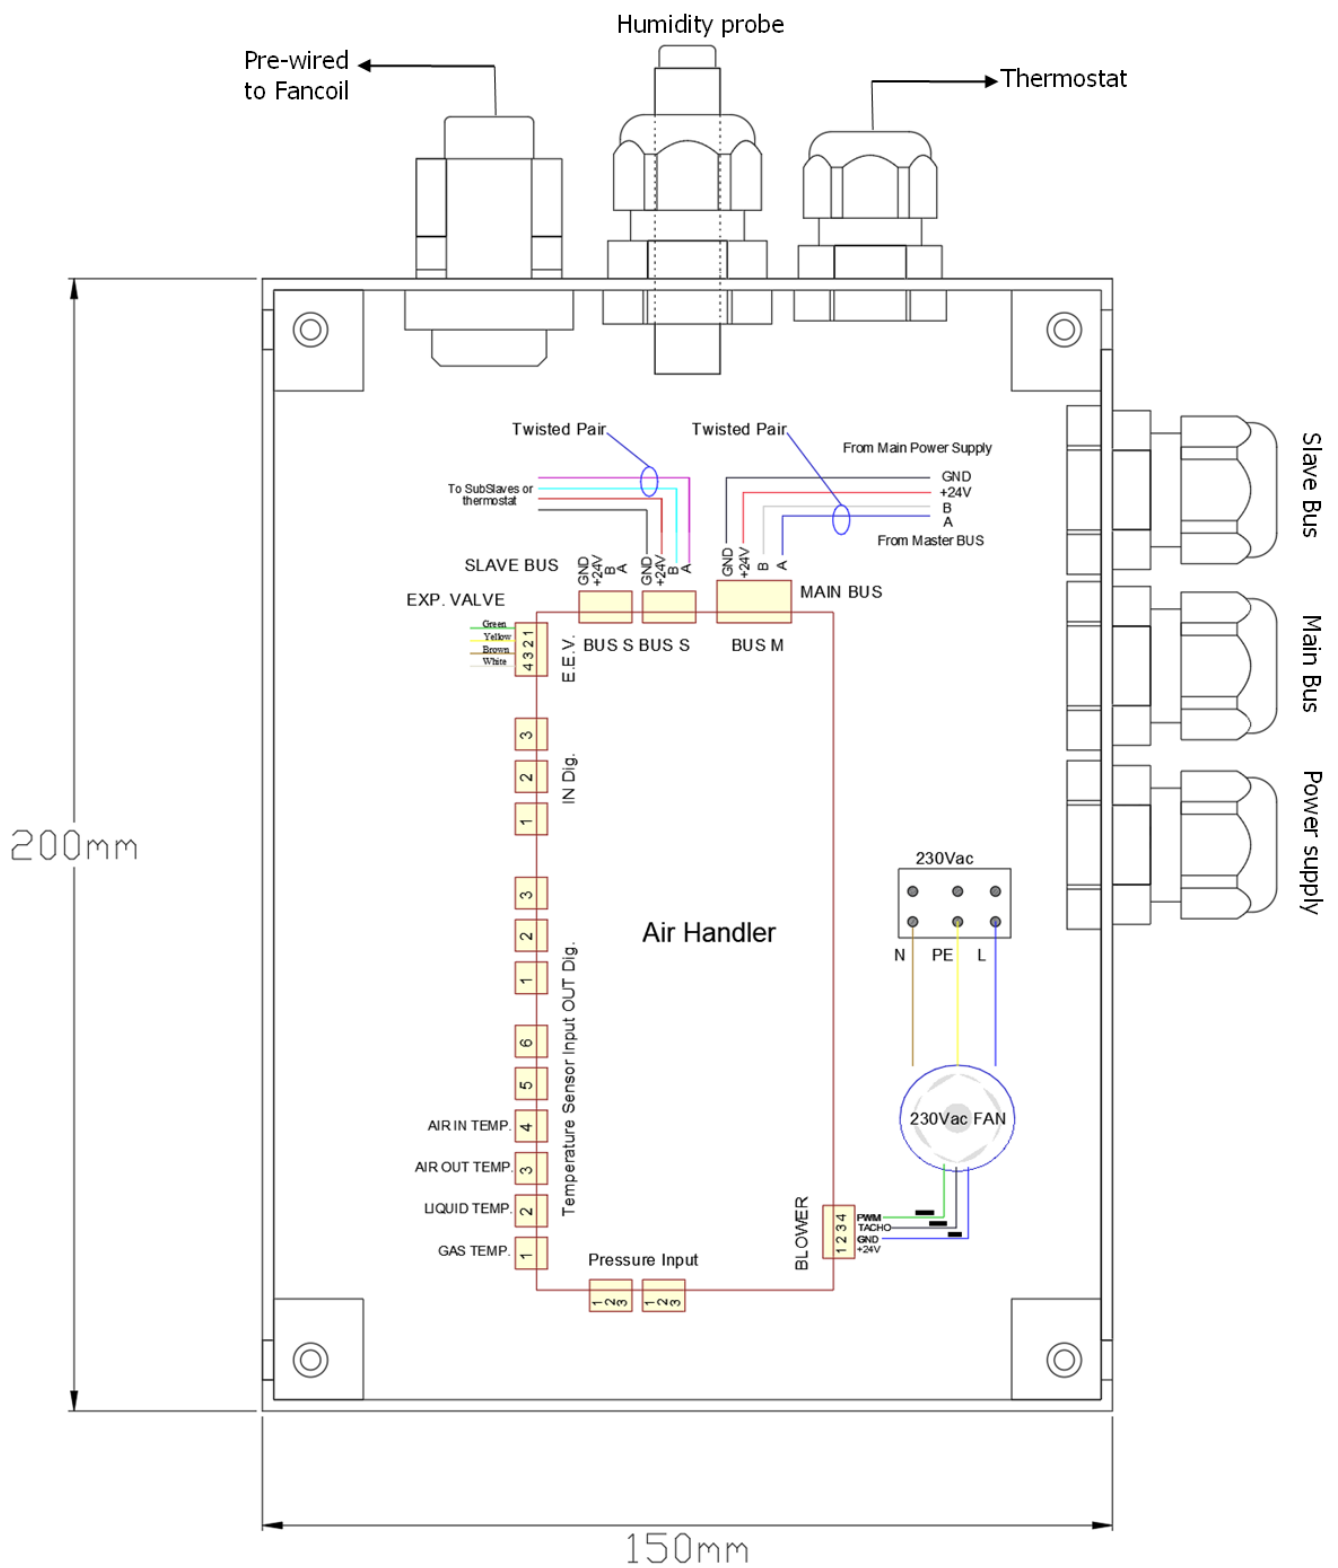

# MR MAXI30i\_HR12

## OVERALL DIMENSIONS

